Ultimate Access E

Motorized trap door opens into the case





Please check all appropriate selections and attach room schedule with verified dimensions.

Specification	ns		
QUANTITY:	SIZE: h. x w. Projectic	screens, recessed ceiling mounted.	
are stamped steel. The trap door and to the screen case doors to hinge dow fully open position. plug-in style conne	nished white. Case constructed of steel, except side trim flan Bottom of case consists of an independently motorized trap the access door both hinge downward to allow access to insi via a concealed full-length hinge. Releasing latches at the ce wward. A prop arm at each end may be pivoted to engage with Internal junction box allows case to be installed and pre-wire cotors, mating with connectors from motorized roller/fabric as s of the ceiling opening.	oor that opens upward inside the screen case. e of screen case. The doors remain attached ter and each end of the screen case allows the endcaps, keeping the door assembly in its I to building supply. Junction box to have two	
	ASSEMBLY: may be installed in case at factory or job site. Be top of case, allowing viewing surface to be centered in case		
Contrast Grey XH8	CE: to be flame and mildew resistant. Bottom of viewing surfa 00E viewing surfaces are certified to GREENGUARD standard uge. NOTE: Matt White XT1000E surfaces up to 10 ¹ (3 m) high von, visit ul.com/gg.	s for low chemical emissions into indoor air	
	lly operated 60 Hz., 110-120V AC, 5-wire motor mounted insid ernal thermal overload protector and electric brake with pres		
CONTROLS: 3-pos	sition control switch to stop or reverse screen at any point. Sv	tch(es) furnished with cover plate.	
MOUNTING METH	HODS: Case may be mounted with 3/8" (9.5 mm) threaded rod th	ough mounting brackets. GREENGUARD GREENGUARD	
interference with c	EKETS: Slide in 18" (457 mm) long channels on top of case, allo onflicting building structures. Brackets must be locked in pos ting brackets may be angled to meet installation requirement	ion by tightening screws. In typical	
PLENUM RATED (SPECIFICATIONS	RTIFIED BY UNDERWRITERS' LABORATORIES, INC. FOR CASE (UL approved "Suitable for Use in Environmental Air Space"). SUBJECT TO CHANGE WITHOUT NOTICE. 3-PART SPECIFICATIONS: available at www.draperinc.cor	HE U.S. AND CANADA.	
Please note: Dime	ensions of rollers, operators and hardware at manufacturer's	iscretion.	
Select Shipp	ing Option	Select Viewing Surface	
☐ Case Nov	v, Screen Assembly Later	☐ Matt White XT1000E	
Complete	e Unit Now	□ Contrast Grey XH800E	
Select Case	Color	☐ Contrast White XH1100E☐ Argent White XH1500E	
■ White (sta	andard)	☐ ClearSound White Weave XT900E	
☐ Black (op:	tional)	☐ ClearSound Grey Weave XH600E	
		•	
Select Motor	Location	☐ Chroma Key Green	
☐ Left end ((standard)	Chroma Key Green	
	(standard)	Chroma Key Green	
☐ Left end (standard) I	□ Chroma Key Green	
☐ Left end (☐ Right end	standard) I	·	
Left end (Right end Right end Select Additi Additiona Extra Dro Length of	standard) I onal Options Il set of mounting brackets for alternate mounting (se	·	
Left end (Right end Right end Select Additi Additiona Extra Dro Length of (Total scree Drop Cole Black	onal Options Il set of mounting brackets for alternate mounting (see Total Drop: ten height cannot exceed 12'(366cm)	·	

See Pages 2 & 3 for Motors and Controls and Standard Dimensions and Data

PROJECT:	
ARCHITECT:	
SUPPLIER:	
DATE:	REVISED:



draperinc.com | 765.987.7999 | 800.238.7999 © 2021 All Rights Reserved | **FORM: UltimateAccessE_Sub21-R**

Select Motor and Controls

- ☐ 110-120V AC (standard)
- Optional Quiet Motor
- ☐ Control Options (for Standard and Quiet 110-120V AC motor):

Please Note: This Draper motorized screen comes with one 110V-120V AC 3-position wall switch (silver wall plate with black rocker).

Total number of 110-120V AC switches

(switches operate independently)

- ☐ Substitute white switch(es) for silver wall plate with black rocker
- ☐ Optional Low-Voltage Control Module (LVC-IV)
- ☐ Factory install LVC-IV inside case? ☐ Yes ☐ No (Video Interface Control included within LVC-IV.)
- ☐ 24 Volt 3-Button Switch Number of 24V switches: ☐ Radio Frequency Remote Control (only with 24V)
 - ☐ Infrared Remote Control (only with 24V)
- Optional Key Operated Switch
- ☐ Power Supply Key Switch (on-off)
- □ 3-Position Key Control
- ☐ 3-Position Switch with Hinged Key-Locking Coverplate

Dimensions and Data

16:10 Format

Nominal Diagonal	Image Area	Overall Size	Case Length ¹	Net Wt. (lbs.)	Qty.
94"	50" x 80"	62" x 83½"	99	100	
109"	57½" x 92"	69½" x 96"	111	120	
113"	60" x 96"	72" x 100"	115	120	
123"	65" x 104"	69" x 108"	123	132	
137"	72½" x 116"	76½" x 120"	135	134	
165"	87½" x 140"	92½" x 144"	159	152	

HDTV Format (16:9)

Nominal Diagonal	Image Area	Overall Size	Case Length ¹	Net Wt. (lbs.)	Qty.
92"	45" x 80"	57" x 83½"	99	100	
100"	49" x 87"	61" x 91"	106	110	
106"	52" x 92"	64" x 96"	111	115	
110"	54" x 96"	66" x 100"	115	120	
119"	58" x 104"	62" x 108"	123	132	
133"	65" x 116"	69" x 120"	135	134	
161"	79" x 140"	84" x 144"	159	152	

NTSC Video Format (4:3)

Nominal Diagonal	Image Area	Overall Size	Case Length ¹	Net Wt. (lbs.)	Qty.
6'	42½" x 56½"	46½" x 59½"	75	85	
7'	50" x 66½"	53½" x 69½"	85	88	
100"	60" x 80"	64" x 83½"	99	103	
10'	69" x 92"	73" x 96"	111	121	
11'	78" x 104"	83" x 108"	123	136	
150"	87" x 116"	92" x 120"	135	138	
15'	105" x 140"	109" x 144"	159	157	


Audio Visual Format

Size (H x W)		Case Length ¹	Net Wt. (lbs.)	Qty.
50" x 50"		65	82	
60" x 60"		75	89	
70" x 70"		85	98	
84" x 84"		99	105	
72" x 96"		111	121	
96" x 96"		111	127	
7' x 9'		123	134	
9' x 9'		123	135	
8' x 10'		135	141	
10' x 10'		135	155	
9' x 12'		159	157	
12' x 12'		159	173	


Custom Size (available up to12'(366cm) wide)

Includes ¾" (19 mm) flange on each end of case. Subtract 1 ¼" (32 mm) for rough ceiling cutout size.

Case Dimensions and Methods of Installation

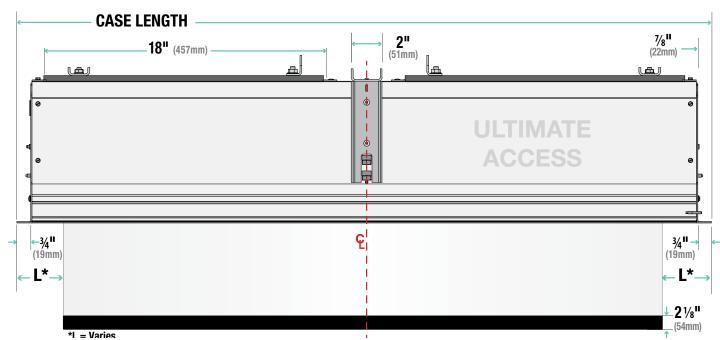


- For minimum length of ceiling cutout: subtract 1¼" (32mm) from case length (measured from outer edge of flanges).
- For minimum width of cutout (front to back): see case width dimensions below.
- **Leveling bracket is used to level the case and should NOT be used to support the weight of the unit.
- The leveling brackets are riveted to the side of the case. Hardware used for leveling provided by others.

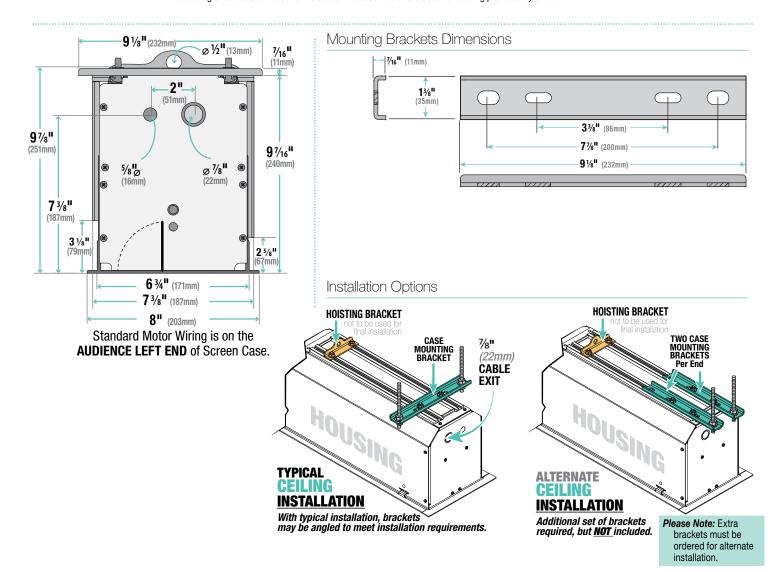


Wiring Diagrams


110-120V Motor and Quiet Motor Single Station Control

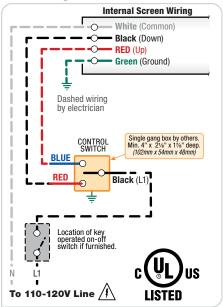


110-120V Motor and Quiet Motor

(Internal Low-Voltage Controller)

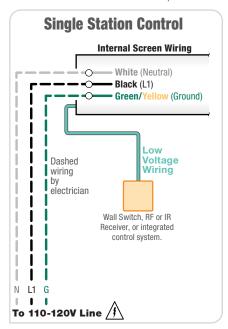

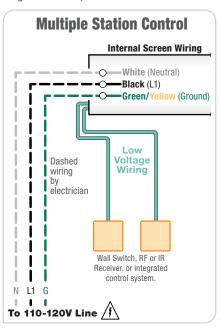

Wiring External LVC-IV to Motor

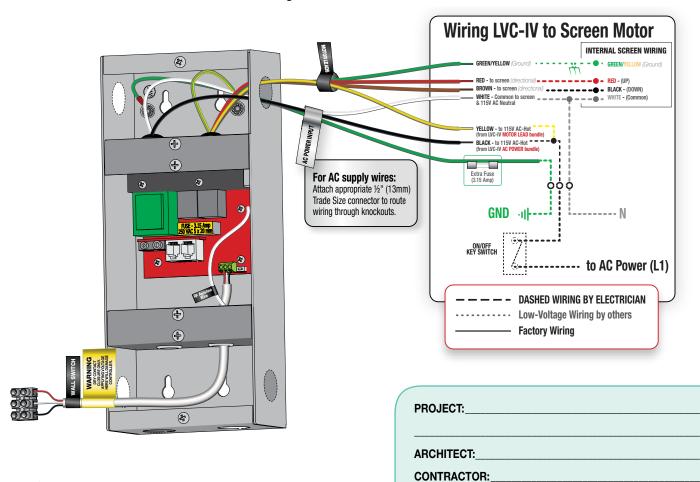

SUPPLIER: DATE:

REVISED:

